
CYTECH

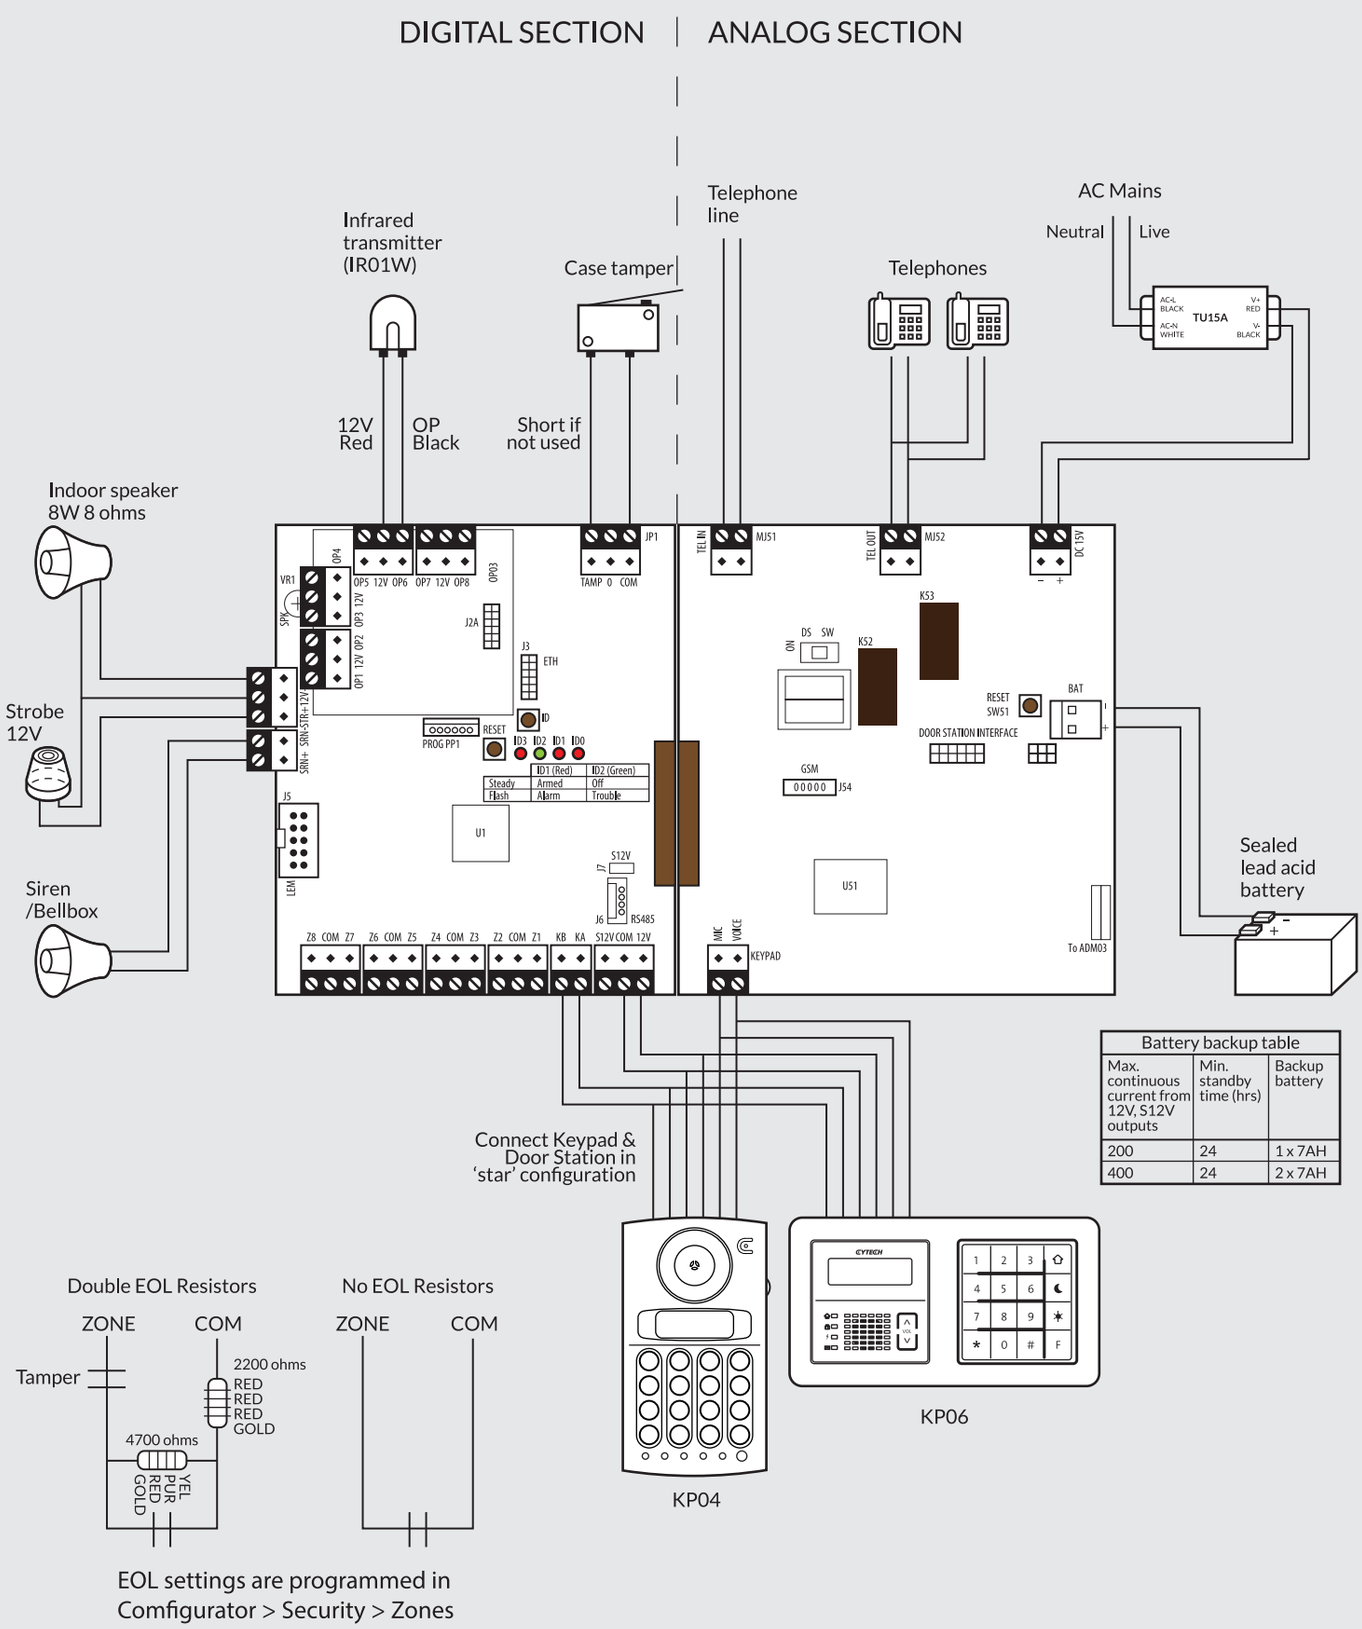

Battery backup table		
Max. continuous current from 12V, S12V outputs	Min. standby time (hrs)	Backup battery
200	24	1 x 7AH
400	24	2 x 7AH

Mains electrical connection should be performed by qualified electricians, and must comply with local safety and electrical regulations.
Supply should be from an unswitched fused mains socket.