


LEM03B

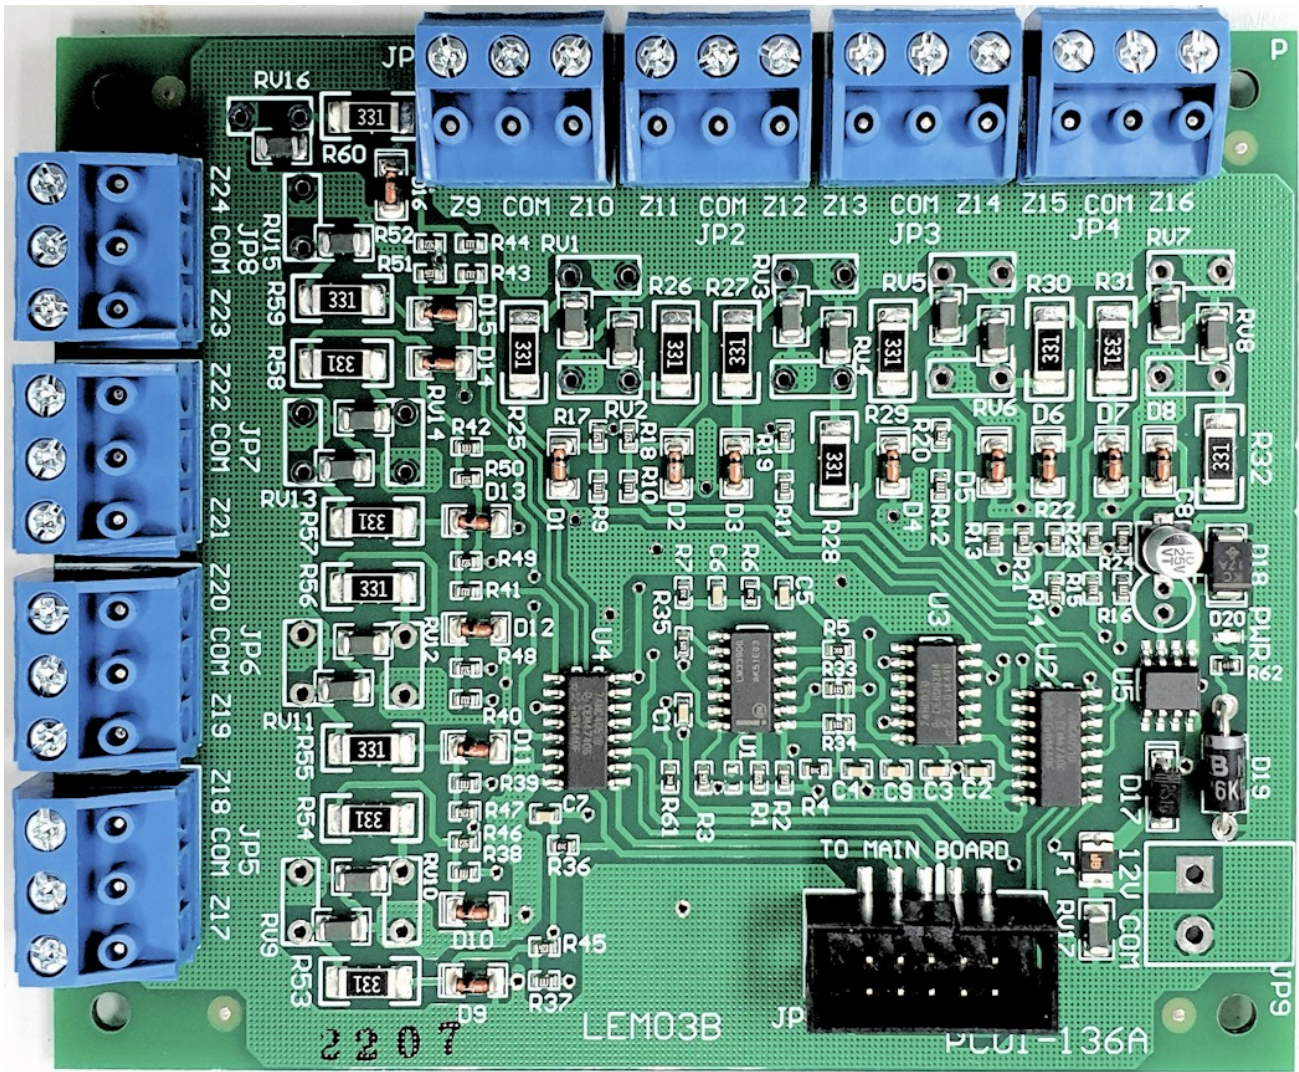

The LEM03B Local Expansion Module with 16 Inputs, 0 Outputs should be connected to the CM9001 (without Slaves) or the last Slave (SEM01C) in the system. SEM01C with a higher ID cannot be connected if LEM03B is connected to the previous Slave or CM9001.

The LEM03B does NOT include zone shunts for selection of No End Of Line (EOL) or Double EOL Resistors. Selection of EOL/No EOL is by Configurator for CM9001 and SEM01C. LEM03B replaces LEM03-M2.

Specifications

- Size 90 x 54 mm, weight 0.05 Kg
- Inputs: 8, Outputs: 0
- "No EOL" or "Double EOL" resistors can be selected in Configurator. No hardware shunts.

Other LEMs

- LEM01B has 8 Inputs, 8 Outputs
- LEM02B has 8 Inputs, 0 outputs

What is Included

- LEM03B PCB
- 4 x SC01-0001 Screw M3 x 6mm
- 4 x SC04-0017 Standoff 11mm
- 4 x SC03-0001 Metal Nut M3
- 1 x Box Carton, (133 x 103 x 26 mm)
- 8 x TB02-0003 3-way Terminal Blocks
- 8 x 2k2 ohms Resistors (End of Line Resistors in series)
- 16 x 4k7 ohms Resistors (End of Line Resistors parallel to contact)

History

1 December 2024 – Initial Release

Size: Double sided A6 leaflet