

DS01 Door Station

The DS01 consists of the following combination of parts, ordered separately



PL11P - Audio Intercom Module



PL41P - Audio/Monochrome, PL41PC audio/color
Fixed 3.6 mm lens



PL71 – Backbox for flush mount



PL81 – Hood (optional, with PL71 Backbox)



PL91 Rain Shelter (For surface mount – does not require PL71 and PL81)

Dimensions

PL11P/PL41P/PL41PC: w99 x h110 x d77mm


PL71: w133 x h91 x d47 mm

PL81: w118 x h41 x d153 mm

PL91: w118 x h80 x d154 mm


Installation Diagram

MA71 – Backbox for flush mount MA61 – Front Frame

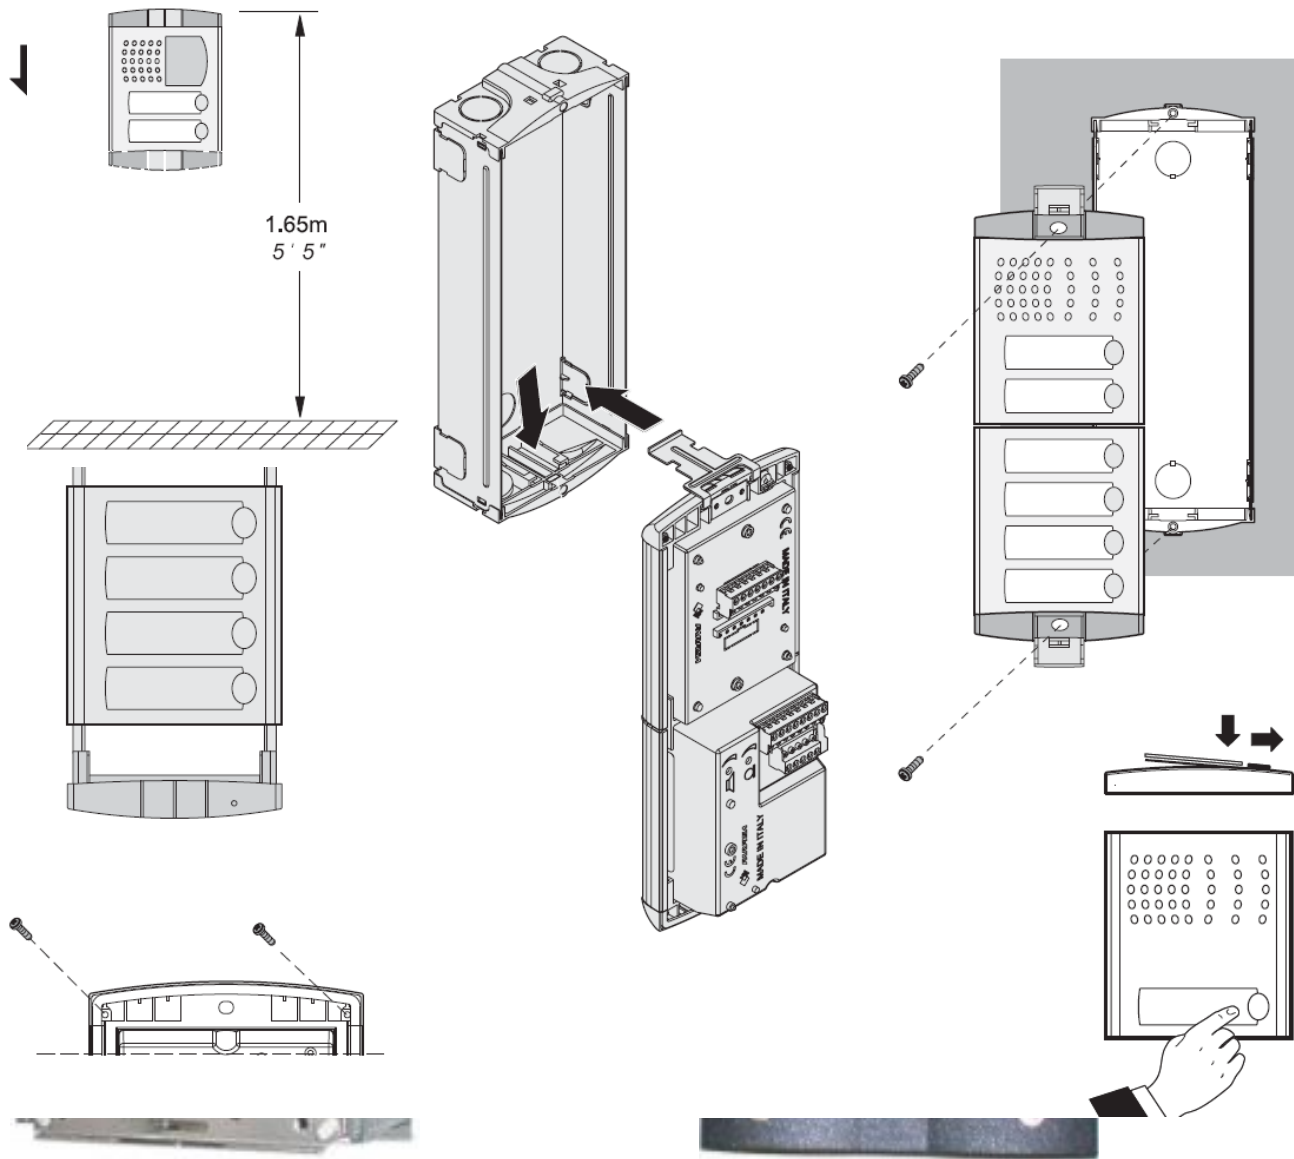

MA71 – Backbox for flush mount

MA61 – Front Frame

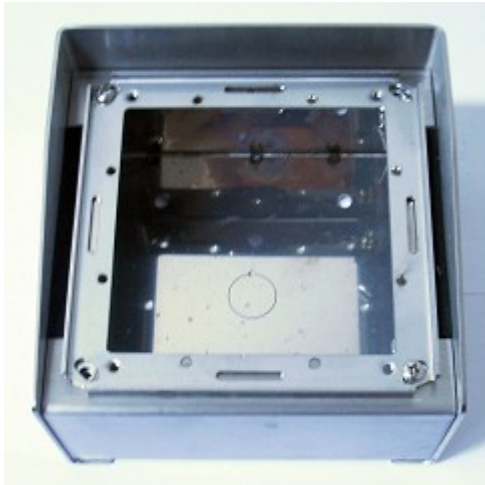

Dimensions

MA11P/MA43/MA43C: w115 x h55 x d115mm


MA61: w140 x h9 x d140 mm


MA71: w128 x h68 x d128 mm

MA91: w146 x h92 x d145 mm

MA91 Rain Shelter (For surface mount – does not require MA71)

Installation Diagram

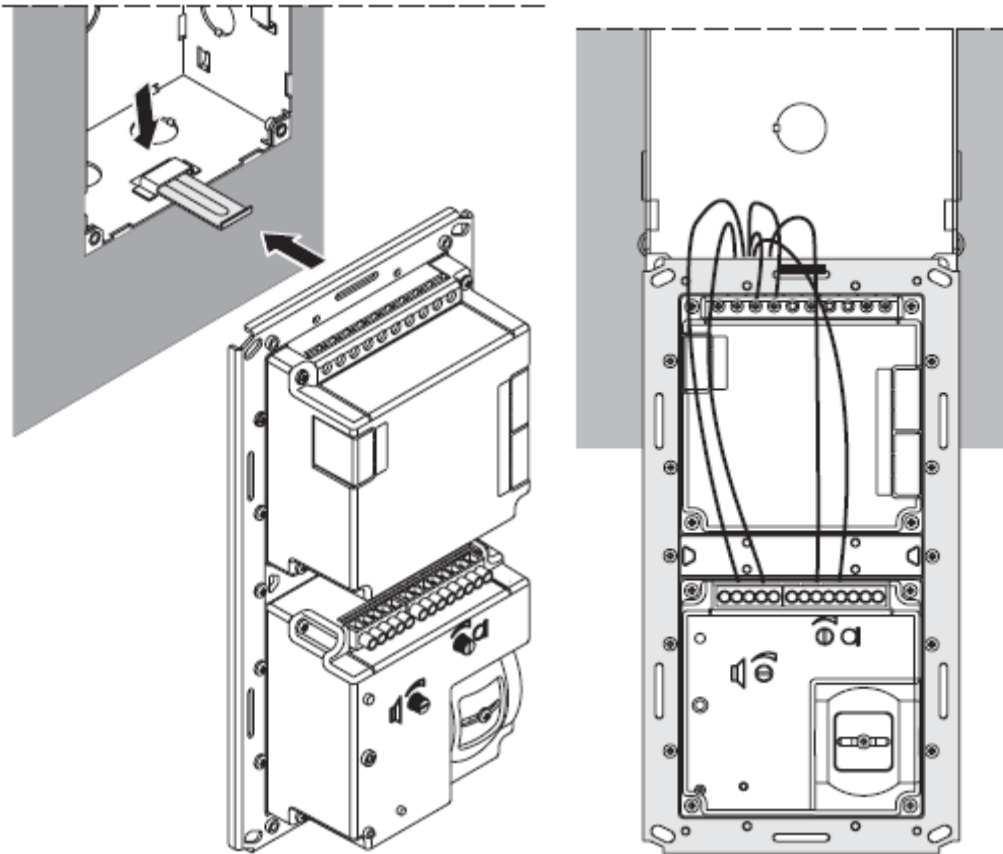

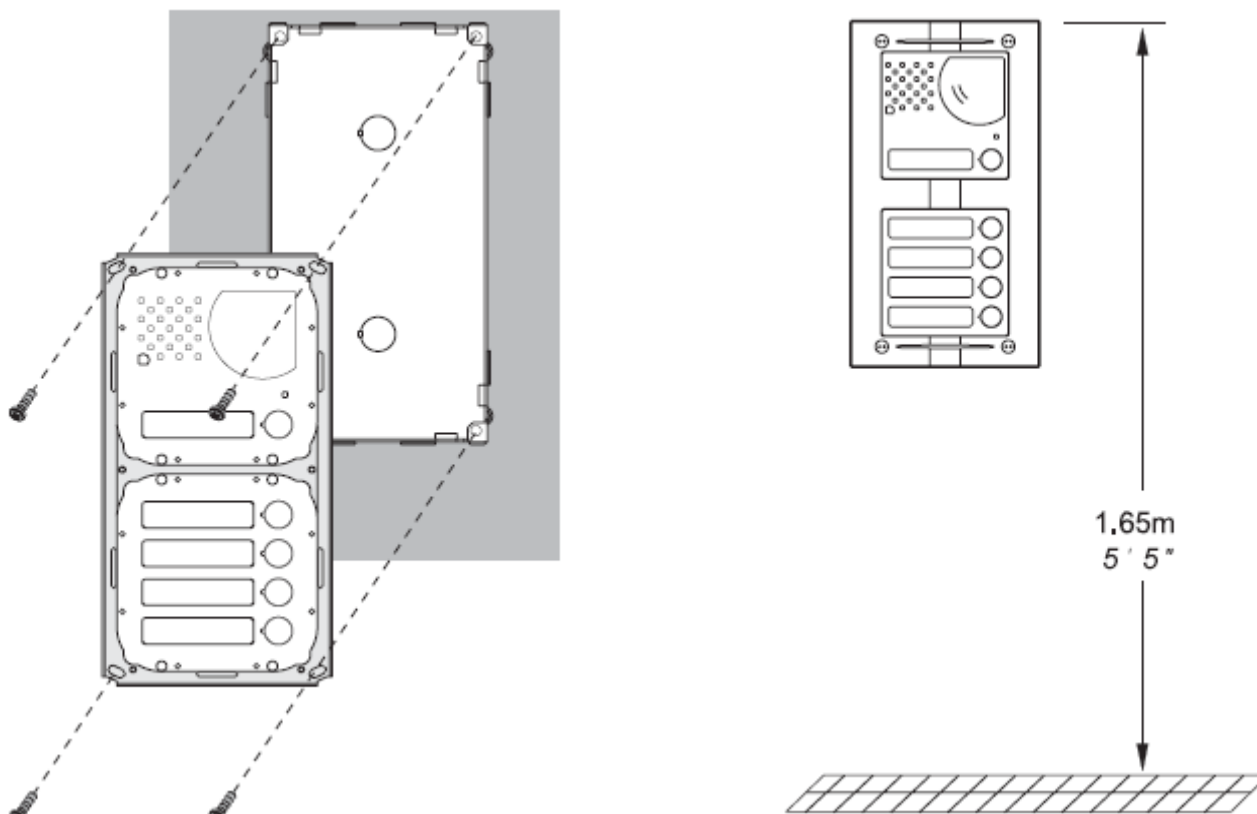

DM02 to DS01 / DS02 Connections

Distance (m)	Terminals			
	1,2,3,4,A, P, C		Video Power	
50	0.5 mm ²	AWG20	0.75 mm ²	AWG18
100	0.75 mm ²	AWG18	1.0 mm ²	AWG16
200	1.0 mm ²	AWG16	1.5 mm ²	AWG14
300	1.5 mm ²	AWG14	2.5 mm ²	AWG12

Connections from DM02 to Comfort are shown in the DM02 manual which can be downloaded from http://www.cytech.biz/dm02_manual.html

History

28 Jan 2014 – added link to DM02 Manual
 26 Jan 2010 – 1.0.2 Added DS02 descriptions
 5 May 2008 – 1.0.1 Corrected DS01 connections
 5 April 2008 – 1.0.0 Initial Release